



CATALOGUE / CATÁLOGO WINDOWS / VENTANAS

Europartners Global Investor Services S.A



+507 6008-5639



egispty@gmail.com





Ventana de aluminio/Aluminum Window



+507 6008-5639



egispty@gmail.com



Ventana de aluminio/Aluminum Window



+507 6008-5639



egispty@gmail.com



Ventana de aluminio/Aluminum Window




+507 6008-5639



egispty@gmail.com



Ventana de aluminio/Aluminum Window

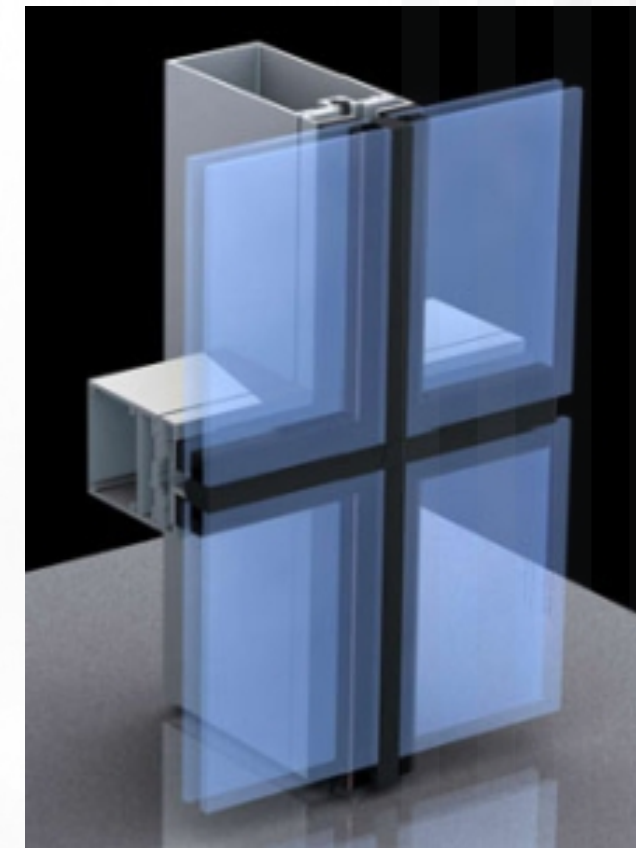

+507 6008-5639



egispty@gmail.com



Ventana de PVC/PVC Window



+507 6008-5639



egispty@gmail.com



Ventana de PVC/PVC Window



+507 6008-5639



egispty@gmail.com





Información de productos/Products Information

Información de productos

- Aleación de aluminio: 6063/6061
- Temple: T4/T5/T6
- Acabado: Anodizado / Recubrimiento en polvo / Transferencia de veta de madera / Granallado (arenado)

Products Information

- Aluminum Alloy: 6063/6061
- Temper: T4/T5/T6
- Finish: Anodized Finish/Power Coating/Wood Grain Transfer/Sand blast

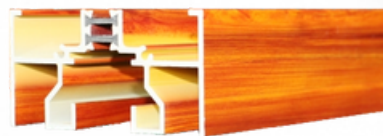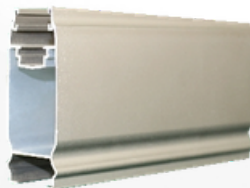

+507 6008-5639



egispty@gmail.com



Perfil de U-PVC/U-PVC profile

Los productos se dividen en:




Series abatibles: 60, 65, 70, 80, 82, 120

Series corredizas: 62, 80, 88, 94, 112, 138 y 166."**

The products are divided into:

60, 65, 70, 80, 82, 120 casement series;

62, 80, 88, 94, 112, 138 and 166 sliding series."**

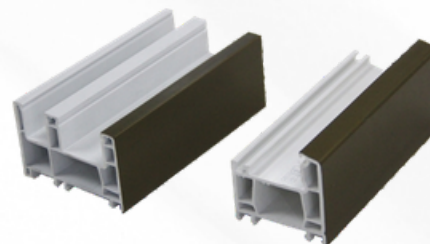

+507 6008-5639



egispty@gmail.com



WINDOWS/VENTANAS

WINDOWS/VENTANAS



+507 6008-5639




egispty@gmail.com



WINDOWS/VENTANAS




WINDOWS/VENTANAS

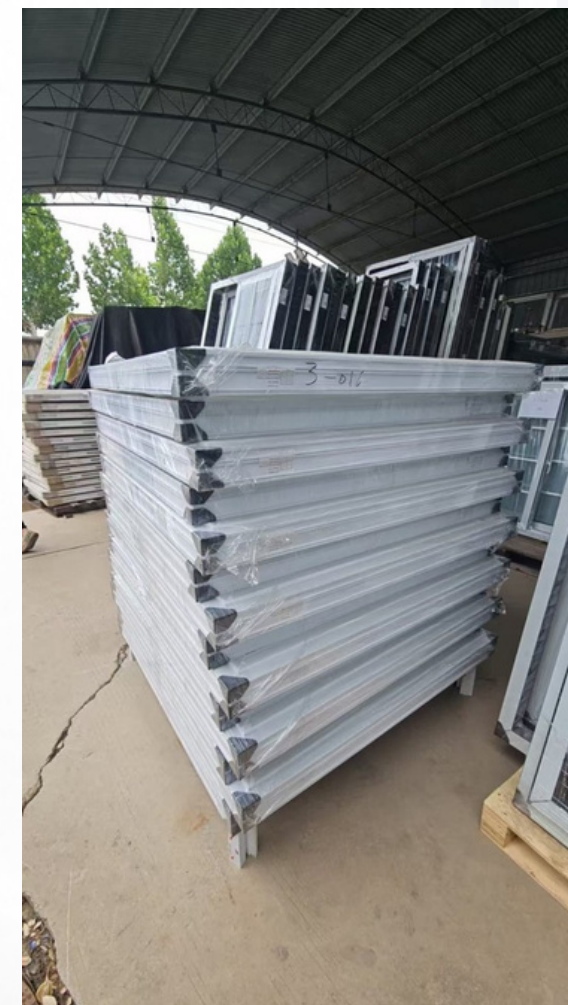

+507 6008-5639




egispty@gmail.com

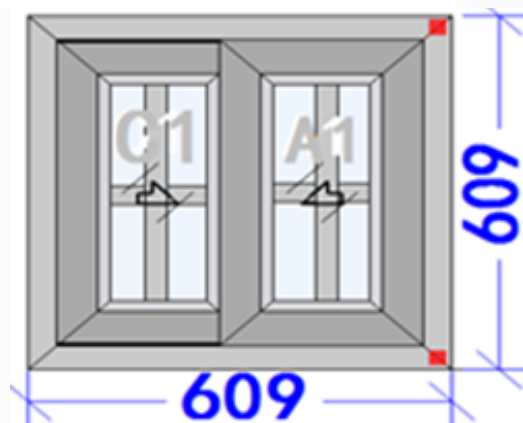

W1-W2

Technical specifications


80 sliding upvc profile, white wall thickness: 1.9mm. Glass: 4mm clear not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in white color. With grids without reinforcement steel.

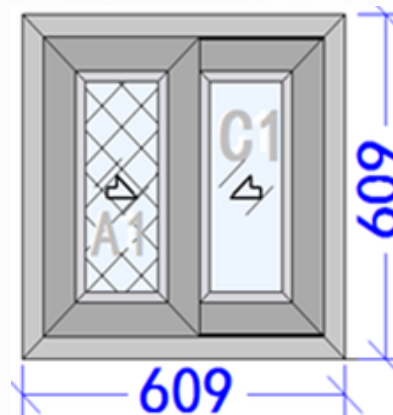

W3-W4

Technical specifications

80 sliding upvc profile, white wall thickness: 1.9mm. Glass: 4mm clear not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in white color. NO grids without reinforcement steel.

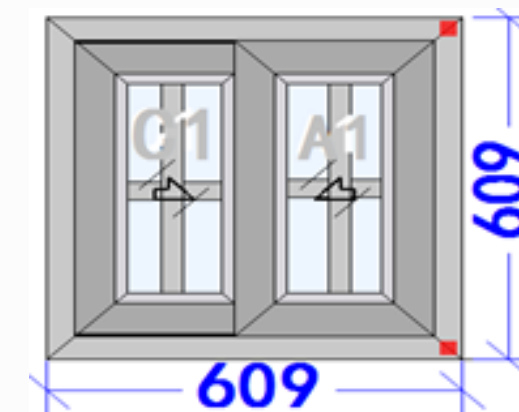


W5

Technical specifications

80 sliding upvc profile, white wall thickness: 1.9mm. Glass: 4mm clear not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in white color. With grids without reinforcement steel.




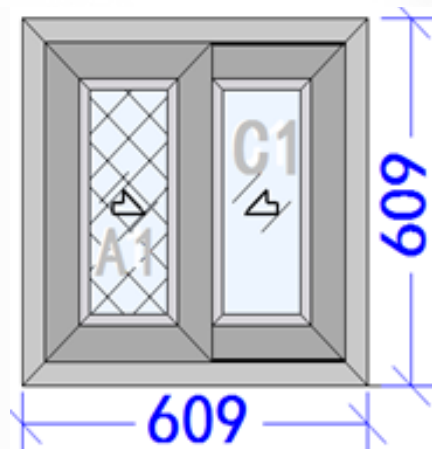

W6

Technical specifications

80 sliding upvc profile, black wall thickness: 1.9mm. Glass: 4mm black, not tempered
Hardware: 1 crescent lock. Screen: Fiberglass in grey color. No grids without reinforcement steel.

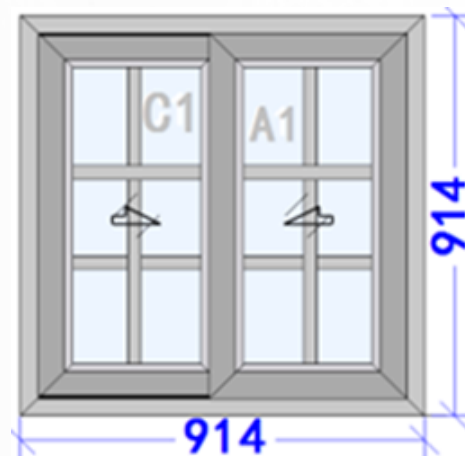

W7-W8

Technical specifications

80 sliding upvc profile, white wall thickness: 1.9mm. Glass: 4mm clear not tempered.
Hardware: 1 crescent lock. Screen: Fiberglass in white color. NO grids without reinforcement steel.




W9-W10

Technical specifications

80 sliding upvc profile, white wall thickness: 1.9mm. Glass: 4mm clear not tempered.
Hardware: 1 crescent lock. Screen: fiberglass in white color. NO grids without reinforcement steel



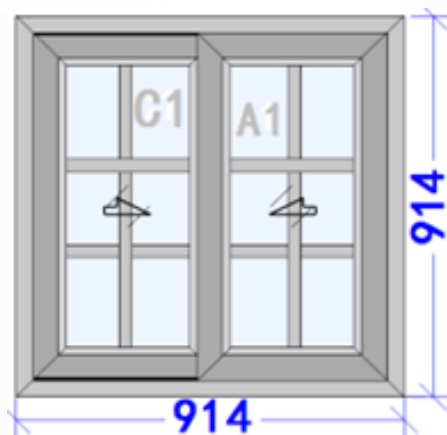

W11

Technical specifications


80 sliding upvc profile, black wall thickness: 1.9mm. Glass: 4mm black, not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in grey color. With grids without reinforcement steel.



W12

Technical specifications

80 sliding upvc profile, black wall thickness: 1.9mm. Glass: 4mm black, not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in grey color. No grids without reinforcement steel.

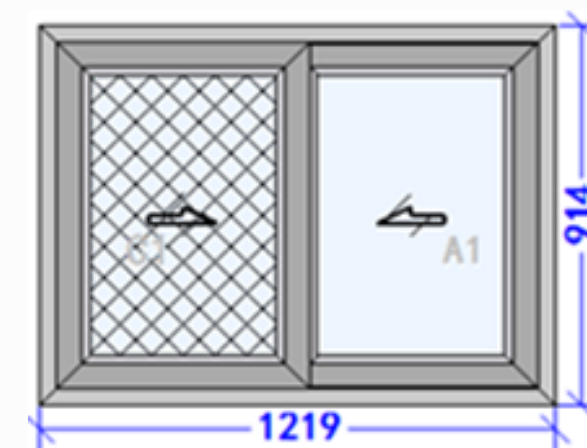


W13

Technical specifications

80 sliding upvc profile, white wall thickness: 1.9mm. Glass: 4mm clear, not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in white color. With grids without reinforcement steel.




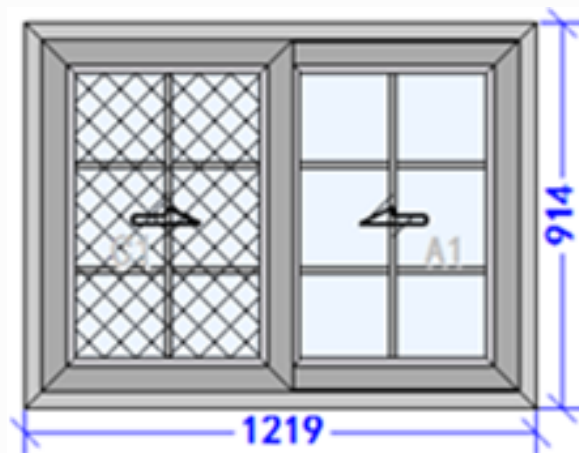

W14

Technical specifications


80 sliding upvc profile, white wall thickness: 1.9mm. Glass: 4mm black, not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in grey color. With grids without reinforcement steel.

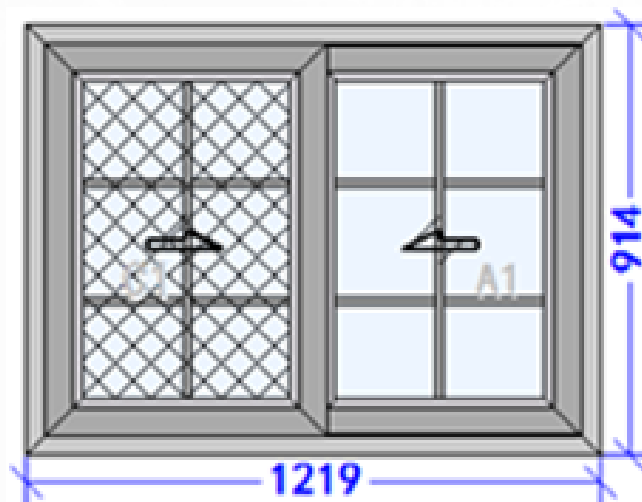

W15

Technical specifications

80 sliding upvc profile, black wall thickness: 1.9mm. Glass: 4mm black, not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in grey color. With grids without reinforcement steel.

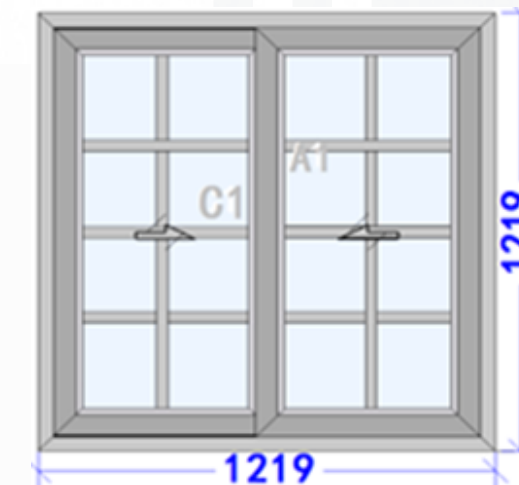

W16-W17

Technical specifications

80 sliding upvc profile, white wall thickness: 1.9mm. Glass: 4mm clear not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in white color. With grids without reinforcement steel.






W18-W19

Technical specifications


80 sliding upvc profile, white wall thickness: 1.9mm. Glass: 4mm clear, not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in white color. NO grids without reinforcement steel.

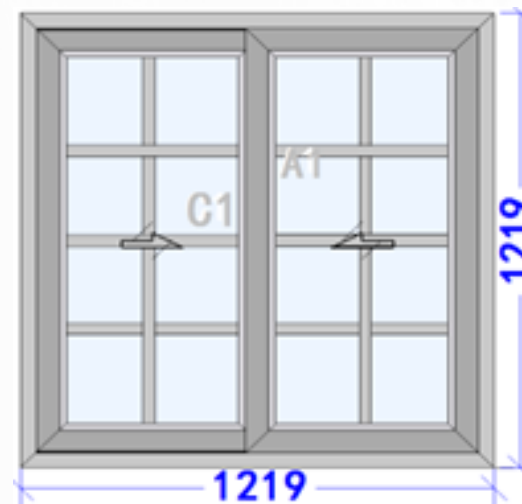

W20

Technical specifications

80 sliding upvc profile, black wall thickness: 1.9mm. Glass: 4mm black, not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in grey color. With grids without reinforcement steel.

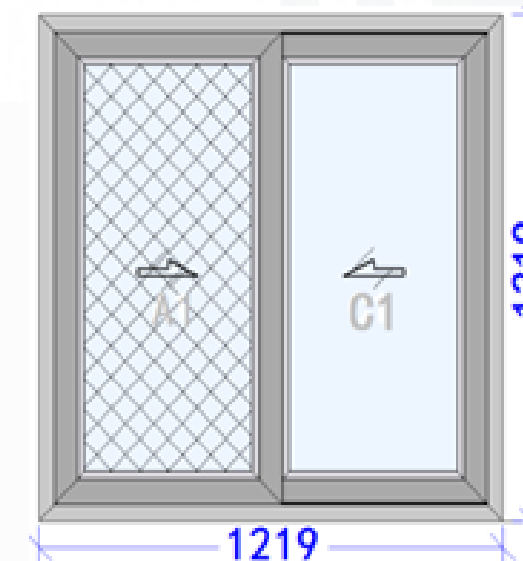

W21

Technical specifications


80 sliding upvc profile, black wall thickness: 1.9mm. Glass: 4mm black, not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in grey color. No grids without reinforcement steel.



+507 6008-5639




egispty@gmail.com

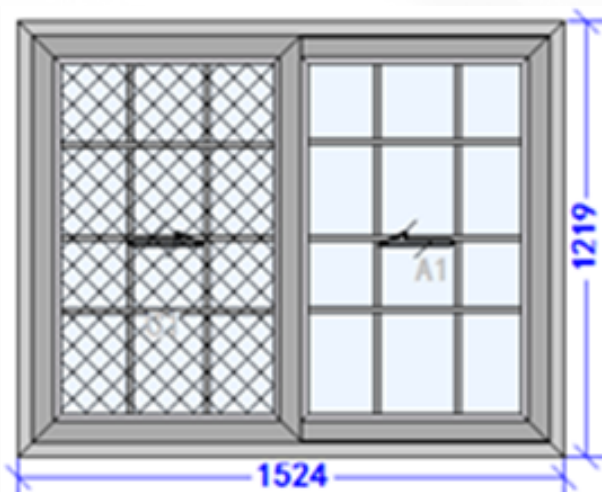

W22-W23

Technical specifications


80 sliding upvc profile, white wall thickness: 1.9mm. Glass: 4mm clear, not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in white color. With grids without reinforcement steel.

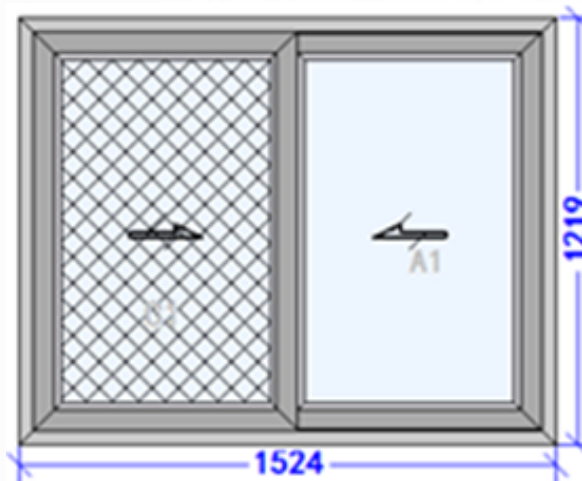

W24

Technical specifications

80 sliding upvc profile, white wall thickness: 1.9mm. Glass: 4mm clear, not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in white color. NO grids without reinforcement steel.

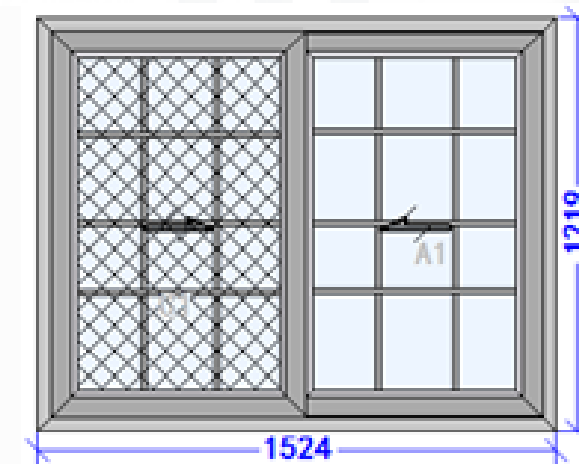


W26

Technical specifications

80 sliding upvc profile, black wall thickness: 1.9mm. Glass: 4mm black, not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in grey color. With grids without reinforcement steel.




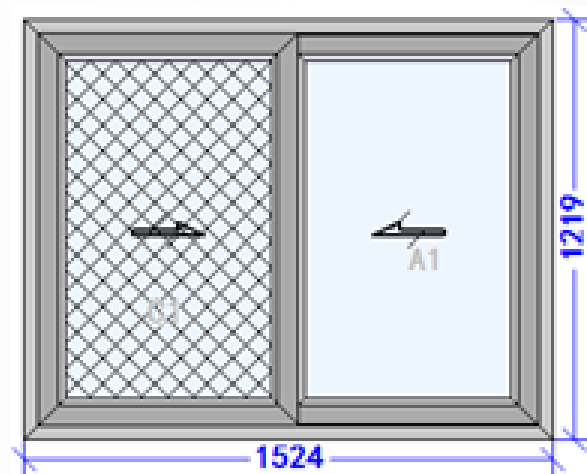

W27

Technical specifications


80 sliding upvc profile, black wall thickness: 1.9mm. Glass: 4mm black, not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in grey color. No grids without reinforcement steel.

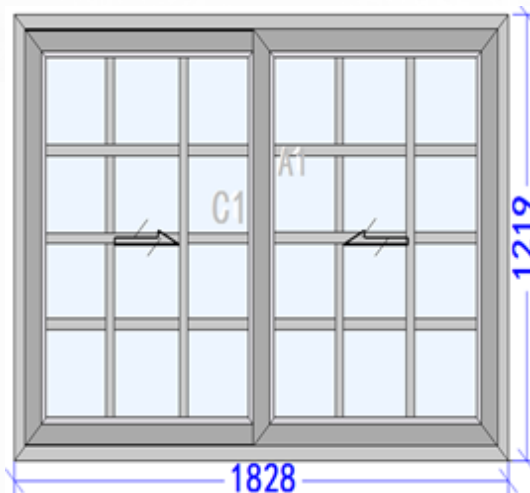

W28

Technical specifications

80 sliding upvc profile, white wall thickness: 1.9mm. Glass: 4mm clear, not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in white color. With grids without reinforcement steel.

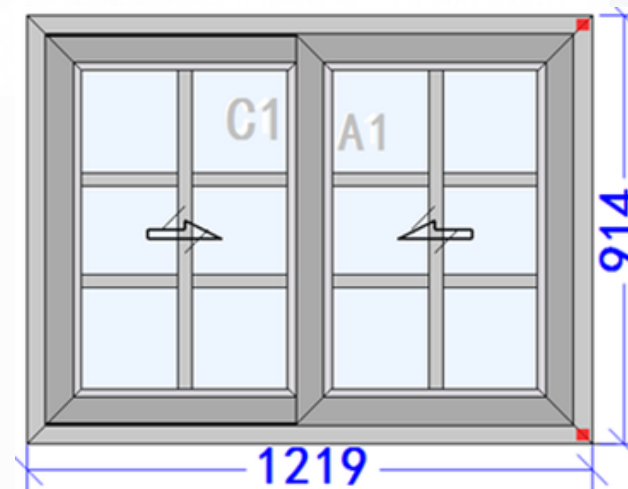

W31- W32 - W33

Technical specifications


80 sliding upvc profile, white wall thickness: 1.9mm. Glass: 4mm clear, not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in white color. With grids without reinforcement steel.



+507 6008-5639




egispty@gmail.com

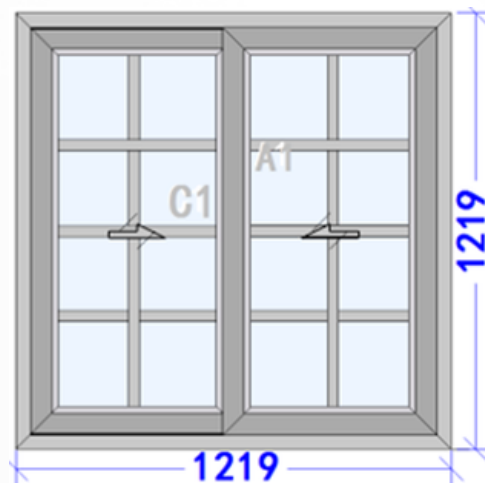

W36 - W37 - W38

Technical specifications


80 sliding upvc profile, black wall thickness: 1.9mm. Glass: 4mm black, not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in grey color. No grids without reinforcement steel.

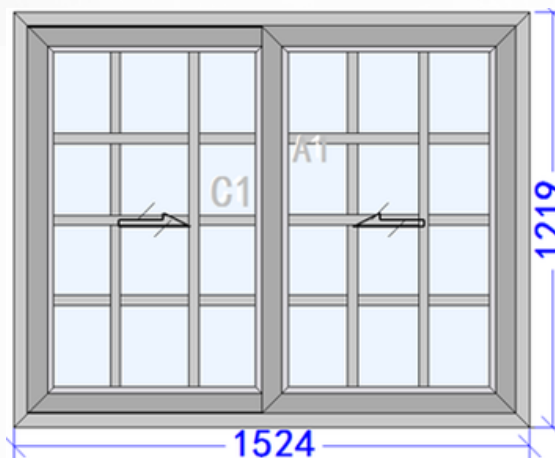

W41 - W42 - W43

Technical specifications

80 sliding upvc profile, white wall thickness: 1.9mm. Glass: 4mm clear, not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in white color. With grids without reinforcement steel.

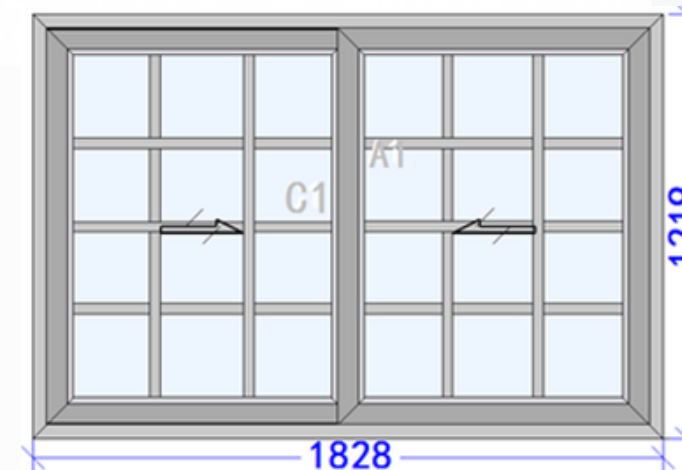

W46 - W47 - W48

Technical specifications

80 sliding upvc profile, white wall thickness: 1.9mm. Glass: 4mm clear, not tempered. Hardware: 1 crescent lock. Screen: Fiberglass in white color. With grids without reinforcement steel.



+507 6008-5639



egispty@gmail.com



SLIDING WINDOWS PRICE LIST

Standard Features

80 Series Sliding Windows

Available Frame Colors: White, Brown, and Black

Glass Options: Clear, Grey, and Black

4mm Glass Thickness

Two Crescent Locks

With Grids

Without Reinforcement Steel

Export Quality





At EuroPartners, we are ready to support you in every project.

En EuroPartners estamos listos para acompañarte en cada proyecto.



Contact us to receive a tailored quote, technical advice, or more information about availability.

We're ready to help you choose the best option.

Contáctanos y recibe una cotización a la medida, asesoría técnica o más información sobre disponibilidad.

Estamos listos para ayudarte a elegir la mejor opción.

Europartners Global Investor Services S.A

+507 6008-5639 egispty@gmail.com